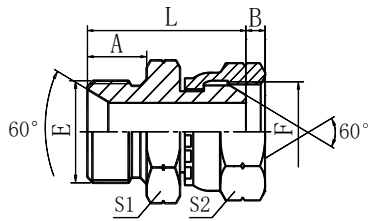


ADAPTER**2B**

BSP MALE DOUBLE USE FOR 60° CONE SEAT OR
BONDED SEAL / BSP FEMALE 60° CONE

PART NO.	THREAD				DIMENSIONS				
	E	F			A	B	L	S1	S2
2B-02Z	G1/8"X28	G1/8"X28			10	5.5	25	14	14
2B-02-04Z	G1/8"X28	G1/4"X19			10	5.5	27	14	19
2B-04Z	G1/4"X19	G1/4"X19			12	5.5	29	19	19
2B-04-06Z	G1/4"X19	G3/8"X19			12	6.3	30.5	19	22
2B-04-08Z	G1/4"X19	G1/2"X14			12	7.5	32	19	27
2B-06Z	G3/8"X19	G3/8"X19			13.5	6.3	34	22	22
2B-06-08Z	G3/8"X19	G1/2"X14			13.5	7.5	35.5	22	27
2B-06-10Z	G3/8"X19	G5/8"X14			13.5	9.5	36	22	30
2B-08Z	G1/2"X14	G1/2"X14			16	7.5	40	27	27
2B-08-06Z	G1/2"X14	G3/8"X19			16	6.3	38.2	27	22
2B-08-12Z	G1/2"X14	G3/4"X14			16	10.9	41	27	32
2B-10Z	G5/8"X14	G5/8"X14			17.5	9.5	42	30	30
2B-10-08Z	G5/8"X14	G1/2"X14			18	7.5	41.5	30	27
2B-10-12Z	G5/8"X14	G3/4"X14			17.5	10.9	42.5	30	32
2B-12Z	G3/4"X14	G3/4"X14			18.5	10.9	44.5	32	32
2B-12-10Z	G3/4"X14	G5/8"X14			18.5	9.5	44	32	30
2B-12-16Z	G3/4"X14	G1"X11			18.5	11.7	46	32	41
2B-16Z	G1"X11	G1"X11			20.5	11.7	50	41	41
2B-16-12Z	G1"X11	G3/4"X14			20.5	10.9	48	41	32
2B-16-20Z	G1"X11	G1.1/4"X11			20.5	10.1	53	41	50
2B-20Z	G1.1/4"X11	G1.1/4"X11			20.5	10.1	55	50	50
2B-20-16Z	G1.1/4"X11	G1"X11			20.5	11.7	52	50	41
2B-20-24Z	G1.1/4"X11	G1.1/2"X11			20.5	12.5	55.5	50	55
2B-24Z	G1.1/2"X11	G1.1/2"X11			23	12.5	58	55	55
2B-32Z	G2"X11	G2"X11			25.5	16.1	63.5	70	70


1. Material options for connector.

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	2B-08Z
304 stainless steel	SR	2B-08SR
316L stainless steel	SV	2B-08SV
316Ti stainless steel	SY	2B-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
			www.fastcouplings.com	

ADAPTER

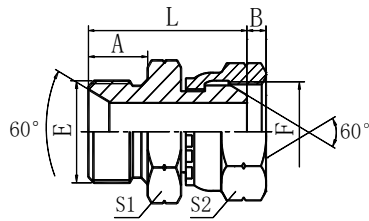

2B

BSP MALE DOUBLE USE FOR 60° CONE SEAT OR
BONDED SEAL / BSP FEMALE 60° CONE

PART NO.	THREAD				DIMENSIONS				
	E	F			A	B	L	S1	S2
Cr3+ plating (Default)		Z	2B-08Z		96			360	
Durakote plating		ZD	2B-08ZD		360			720	
Zinc-nickel plating		ZN	2B-08ZN		1000			-	