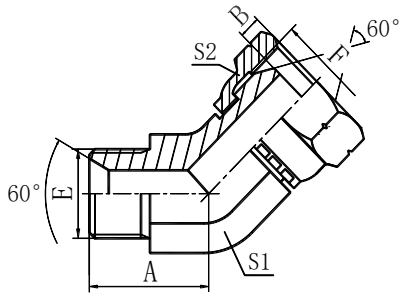


ADAPTER**2B4**

BSP MALE 60° SEAT / BSP FEMALE 60° CONE 45° ELBOW

PART NO.	THREAD				DIMENSIONS				
	E	F			A	B	S1	S2	
2B4-04Z	G1/4"X19	G1/4"X19			20.3	5.5	14	19	
2B4-04-06Z	G1/4"X19	G3/8"X19			20.3	6.3	14	22	
2B4-06Z	G3/8"X19	G3/8"X19			22	6.3	16	22	
2B4-06-04Z	G3/8"X19	G1/4"X19			22	5.5	16	19	
2B4-08Z	G1/2"X14	G1/2"X14			27	7.5	22	27	
2B4-08-06Z	G1/2"X14	G3/8"X19			27	6.3	22	22	
2B4-10Z	G5/8"X14	G5/8"X14			28.5	9.5	22	30	
2B4-10-08Z	G5/8"X14	G1/2"X14			28.5	7.5	22	27	
2B4-12Z	G3/4"X14	G3/4"X14			31	10.9	27	32	
2B4-16Z	G1"X11	G1"X11			35	11.7	33	41	
2B4-20Z	G1.1/4"X11	G1.1/4"X11			38.5	11	41	50	
2B4-24Z	G1.1/2"X11	G1.1/2"X11			44	13	48	55	
2B4-32Z	G2"X11	G2"X11			51	16	63	70	

1. Material options for connector.

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	2B4-08Z
304 stainless steel	SR	2B4-08SR
316L stainless steel	SV	2B4-08SV
316Ti stainless steel	SY	2B4-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust(Hours)
Cr3+ plating (Default)	Z	2B4-08Z	96	360
Durakote plating	ZD	2B4-08ZD	360	720
Zinc-nickel plating	ZN	2B4-08ZN	1000	-