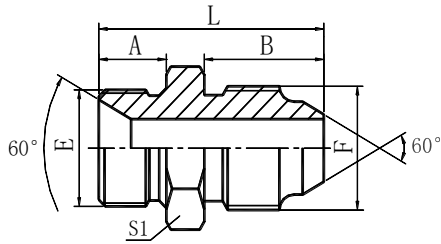


ADAPTER**1BK**

BSP MALE 60° SEAT/JIS METRIC MALE 60° CONE

PART NO.	THREAD				DIMENSIONS				
	E	F			A	B	L	S1	
1BK-04-14Z	G1/4"X19	M14X1.5			12	17	35	19	
1BK-04-18Z	G1/4"X19	M18X1.5			12	18	38	22	
1BK-06-18Z	G3/8"X19	M18X1.5			13.5	18	39.5	22	
1BK-06-22Z	G3/8"X19	M22X1.5			13.5	20	41.5	24	
1BK-08-18Z	G1/2"X14	M18X1.5			16	18	44	27	
1BK-08-20Z	G1/2"X14	M20X1.5			16	20	46	27	
1BK-08-22Z	G1/2"X14	M22X1.5			16	20	46	27	
1BK-08-24Z	G1/2"X14	M24X1.5			16	21.5	45.5	27	
1BK-10-24Z	G5/8"X14	M24X1.5			17.5	21.5	49	30	
1BK-12-30Z	G3/4"X14	M30X1.5			18.5	26	55.5	32	
1BK-16-33Z	G1"X11	M33X1.5			20.5	30	63.5	41	
1BK-20-36Z	G1.1/4"X11	M36X1.5			20.5	33	68.5	50	

1. Material options for connector

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	1BK-08-22Z
304 stainless steel	SR	1BK-08-22SR
316L stainless steel	SV	1BK-08-22SV
316Ti stainless steel	SY	1BK-08-22SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust(Hours)
Cr3+ plating (Default)	Z	1BK-08-22Z	96	360
Durakote plating	ZD	1BK-08-22ZD	360	720
Zinc-nickel plating	ZN	1BK-08-22ZN	1000	-