


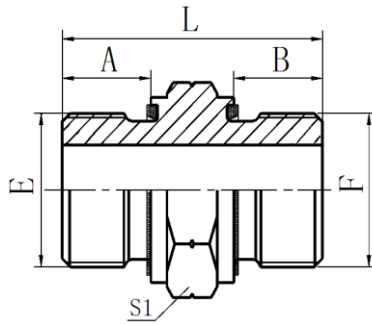

1B-2WD

BSP MALE CAPTIVE SEAL

PARTNO.	THREAD		CAPTIVE SEAL		DIMENSIONS					
	E	F	E	F	A	B	L	S1		
1B-02(2WD)Z	G1/8"X28	G1/8"X28	WD-B02	WD-B02	8	8	25	14		
1B-02-04(2WD)Z	G1/8"X28	G1/4"X19	WD-B02	WD-B04	8	12	29.5	19		
1B-04(2WD)Z	G1/4"X19	G1/4"X19	WD-B04	WD-B04	12	12	34	19		
1B-04-06(2WD)Z	G1/4"X19	G3/8"X19	WD-B04	WD-B06	12	12	36.5	22		
1B-06(2WD)Z	G3/8"X19	G3/8"X19	WD-B06	WD-B06	12	12	35	22		
1B-06-08(2WD)Z	G3/8"X19	G1/2"X14	WD-B06	WD-B08	12	14	41.5	27		
1B-08(2WD)Z	G1/2"X14	G1/2"X14	WD-B08	WD-B08	14	14	44	27		
1B-08-12(2WD)Z	G1/2"X14	G3/4"X14	WD-B08	WD-B12	14	16	45	32		
1B-12(2WD)Z	G3/4"X14	G3/4"X14	WD-B12	WD-B12	16	16	47	32		
1B-12-16(2WD)Z	G3/4"X14	G1"X11	WD-B12	WD-B16	16	18	53	41		
1B-16(2WD)Z	G1"X11	G1"X11	WD-B16	WD-B16	18	18	55	41		
1B-16-20(2WD)Z	G1"X11	G1.1/4"X11	WD-B16	WD-B20	18	20	59	50		
1B-20(2WD)Z	G1.1/4"X11	G1.1/4"X11	WD-B20	WD-B20	20	20	61	50		
1B-20-24(2WD)Z	G1.1/4"X11	G1.1/2"X11	WD-B20	WD-B24	20	22	63	55		
1B-24(2WD)Z	G1.1/2"X11	G1.1/2"X11	WD-B24	WD-B24	22	22	65	55		
1B-24-32(2WD)Z	G1.1/2"X11	G2"X11	WD-B24	WD-B32	22	20	66	75		
1B-32(2WD)Z	G2"X11	G2"X11	WD-B32	WD-B32	20	20	65	75		

1. Material options for connector body and the Captive seal.

Connector body material	Captive seal material	Part. No. suffix	Part No. example
Carbon steel (Default)	NBR	Z	1B-08(2WD)Z
304 stainless steel	Viton	SR	1B-08(2WD)SR
316L stainless steel	Viton	SV	1B-08(2WD)SV
316Ti stainless steel	Viton	SY	1B-08(2WD)SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust(Hours)
Cr3+ plating (Default)	Z	1B-08(2WD)Z	96	360
Durakote plating	ZD	1B-08(2WD)ZD	360	720
Zinc-nickel plating	ZN	1B-08(2WD)ZN	1000	-