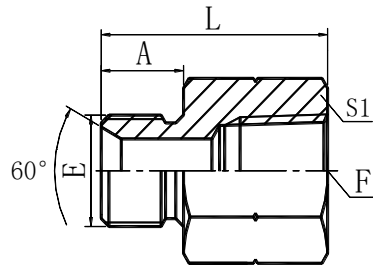


ADAPTER**5BT**

BSP MALE DOUBLE USE FOR 60° CONE SEAT OR BONDED SEAL / BSPT FEMALE

PART NO.	THREAD		DIMENSIONS						
	E	F			A	L	S1		
5BT-04-02Z	G1/4"X19	Rc1/8"X28			12	28	19		
5BT-04Z	G1/4"X19	Rc1/4"X19			12	33.5	19		
5BT-04-06Z	G1/4"X19	Rc3/8"X19			12	34	22		
5BT-04-08Z	G1/4"X19	Rc1/2"X14			13.5	41.5	27		
5BT-06-04Z	G3/8"X19	Rc1/4"X19			13.5	32	22		
5BT-06Z	G3/8"X19	Rc3/8"X19			13.5	34.5	22		
5BT-08-06Z	G1/2"X14	Rc3/8"X19			16	39.5	27		
5BT-08Z	G1/2"X14	Rc1/2"X14			16	45	27		
5BT-10-08Z	G5/8"X14	Rc1/2"X14			17.5	43.5	30		
5BT-12-08Z	G3/4"X14	Rc1/2"X14			18.5	47.5	32		
5BT-12Z	G3/4"X14	Rc3/4"X14			18.5	49	36		
5BT-16-12Z	G1"X11	Rc3/4"X14			20.5	47.5	41		
5BT-16Z	G1"X11	Rc1"X11			20.5	57	41		
5BT-20Z	G1.1"X11	Rc1.1/4"X11			20.5	58.5	50		
5BT-24Z	G1.1/2"X11	Rc1.1/2"X11			23	61	55		

1. Material options for connector

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	5BT-08Z
304 stainless steel	SR	5BT-08SR
316L stainless steel	SV	5BT-08SV
316Ti stainless steel	SY	5BT-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust(Hours)
Cr3+ plating (Default)	Z	5BT-08Z	96	360
Durakote plating	ZD	5BT-08ZD	360	720
Zinc-nickel plating	ZN	5BT-08ZN	1000	-