


INTERLOCK HOSE FITTING

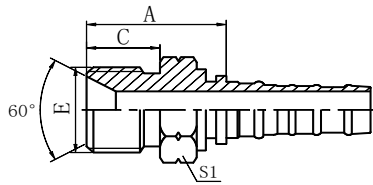

BSP MALE 60° CONE SEAT

12613

REF. ISO 12151-6

PART NO.	E THREAD E	HOSE SIZE			DIMENSIONS			
		DN	DASH		A	C	S1	
12613-20-20Z	G1.1/4"X11	32	20		49.3	20.5	46	
12613-24-24Z	G1.1/2"X11	40	24		53.7	23	50	
12613-32-32Z	G2"X11	50	32		59	25.5	65	

1. Material options for nipple.

Nipple material	Part. No. suffix	Part No. example
Carbon steel (Default)	TZ/WZ	12613-24-24Z
304 stainless steel	SRT/SRW	12613-24-24SR
316L stainless steel	SVT/SVW	12613-24-24SV
316Ti stainless steel	SYT/SYW	12613-24-24SY

2. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust(Hours)
Cr3+ plating (Default)	Z	12613-24-24Z	96	360
Durakote plating	ZD	12613-24-24ZD	360	720
Zinc-nickel plating	ZN	12613-24-24ZN	1000	-