


HOSE FITTING

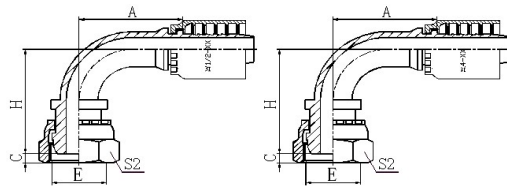

20491CY

20492CY

90° METRIC FEMALE 24° MULTISEAL L SERIES

PART NO.		THREAD E	HOSE SIZE		TUBE O.D.	DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	H	S2
20491CY-14-04Z *	-	M14X1.5	6	04	8	30	3.5	28.5	19
20491CY-16-04TZ	-	M16X1.5	6	04	10	30	4	32	19
20491CY-16-05Z *	-	M16X1.5	8	05	10	33	3.5	32	22
20491CY-16-06Z	20492CY-16-06Z	M16X1.5	10	06	10	35	3.5	32	22
20491CY-18-06TZ *	20492CY-18-06TZ	M18X1.5	10	06	12	37	3	35	22
20491CY-22-08TZ	20492CY-22-08TZ	M22X1.5	12	08	15	42	4.5	42	27
20491CY-26-10TZ	20492CY-26-10TZ	M26X1.5	16	10	18	51.2	4	51.5	32
20491CY-30-12TZ	20492CY-30-12TZ	M30X2	20	12	22	57	7	55.5	36
20491CY-36-12TZ	20492CY-36-12TZ	M36X2	20	12	28	55.3	6.5	55.5	41

1. Part no. marked with "*" is recommended.

2. The recommended match hoses for 1 piece braided fittings are : FC687/EC115-16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425-16 and smaller sizes; GH506/EC512-12 and larger sizes with skive crimping.

3. Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z/TZ	20491CY-22-08TZ
304 stainless steel	SR/SRT	20491CY-22-08SRT
316L stainless steel	SV/SVT	20491CY-22-08SVT
316Ti stainless steel	SY/SYT	20491CY-22-08SYT

4. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	20491CY-22-08TZ	96	360
Durakote plating	ZD	20491CY-22-08TZD	360	720
Zinc-nickel plating	ZN	20491CY-22-08TZN	1000	-