


HOSE FITTING

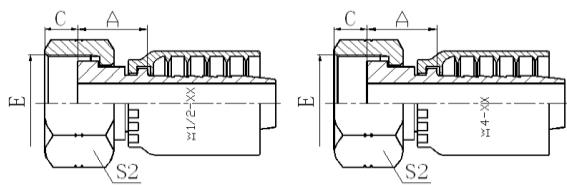

ORFS FEMALE FLAT SEAT

24211Y

24212Y

REF. ISO 12151-1 / SAE J516

PART NO.		THREAD E	HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	S2	
24211Y-04-04Z *	-	9/16"X18	6	04		22.5	8.5	17	
24211Y-04-05Z	-	9/16"X18	8	05		22.5	8.5	17	
24211Y-04-06Z	24212Y-04-06Z	9/16"X18	10	06		22.5	8.5	17	
24211Y-06-04TZ *	-	11/16"X16	6	04		23.5	10	22	
24211Y-06-05TZ	-	11/16"X16	8	05		23.5	10	22	
24211Y-06-06Z *	24212Y-06-06Z *	11/16"X16	10	06		25.5	10	22	
24211Y-06-08Z	24212Y-06-08Z	11/16"X16	12	08		26	10	22	
24211Y-08-05TZ	-	13/16"X16	8	05		25	11	24	
24211Y-08-06TZ *	24212Y-08-06TZ	13/16"X16	10	06		25	11	24	
24211Y-08-08Z *	24212Y-08-08Z *	13/16"X16	12	08		28	11	24	
24211Y-08-10Z	24212Y-08-10Z	13/16"X16	16	10		29	11	24	
24211Y-10-08TZ	24212Y-10-08TZ	1"X14	12	08		29.5	13	30	
24211Y-10-10Z *	24212Y-10-10Z *	1"X14	16	10		33	13	30	
24211Y-10-12Z	24212Y-10-12Z	1"X14	20	12		33.5	13	30	
24211Y-12-08TZ	24212Y-12-08TZ	1.3/16"X12	12	08		30.5	15	36	
24211Y-12-10TZ *	24212Y-12-10TZ	1.3/16"X12	16	10		31.5	15	36	
24211Y-12-12Z *	24212Y-12-12Z *	1.3/16"X12	20	12		35	15	36	
24211Y-12-16Z	24212Y-12-16Z	1.3/16"X12	25	16		36	15	36	
24211Y-16-12TZ *	24212Y-16-12TZ	1.7/16"X12	20	12		35	14.8	41	
24211Y-16-16TZ *	24212Y-16-16Z *	1.7/16"X12	25	16		35	14.8	41	
24211Y1-16-20Z +	-	1.7/16"X12	32	20		39.5	14.8	41	
24211Y-16-20Z ++	24212Y-16-20Z	1.7/16"X12	32	20		39.5	14.8	41	
24211Y-20-16TZ	24212Y-20-16TZ	1.11/16"X12	25	16		34.5	15	50	
24211Y1-20-20WZ * +	-	1.11/16"X12	32	20		42.5	15	50	
24211Y-20-20WZ * ++	24212Y-20-20WZ	1.11/16"X12	32	20		42.5/45.1	15	50	
24211Y-20-24WZ	24212Y-20-24WZ	1.11/16"X12	40	24		42.5/45.4	15	50	
24211Y1-24-20TZ +	-	2"X12	32	20		36	14.8	60	
24211Y-24-20TZ ++	24212Y-24-20TZ	2"X12	32	20		36/38.6	14.8	60	
24211Y-24-24TZ	24212Y-24-24TZ	2"X12	40	24		36/39	14.8	60	

1. The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.
2. Part no. marked with "*" is recommended.
3. Marked with "+" design for GH781, GH663, FC686, EC110, EC881 hose, Marked with "++" design for GH793, EC210, EC215 hose.
4. The recommended match hoses for 1 piece braided fittings are : FC687/EC115-16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425-16 and smaller sizes; GH506/EC512-12 and larger sizes with skive crimping.
5. Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z/TZ/WZ	24211Y-08-08Z
304 stainless steel	SR/SRT/SRW	24211Y-08-08SR
316L stainless steel	SV/SVT/SVW	24211Y-08-08SV
316Ti stainless steel	SY/SYT/SYW	24211Y-08-08SY

6. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	24211Y-08-08Z	96	360
Durakote plating	ZD	24211Y-08-08ZD	360	720
Zinc-nickel plating	ZN	24211Y-08-08ZN	1000	-