


HOSE FITTING

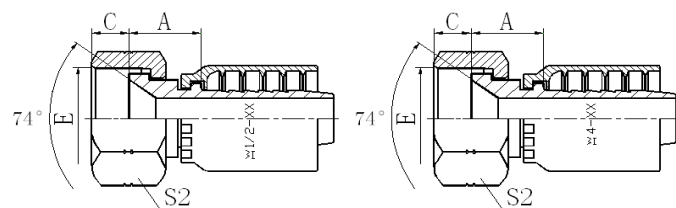

JIC FEMALE 74° CONE SEAT

REF. ISO 12151-5 / SAE J516

26711Y**26712Y**

PART NO.		THREAD E	HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	S2	
26711Y-04-03Z	-	7/16"X20	5	3		14	9	14	
26711Y-04-04Z *	-	7/16"X20	6	04		15	9	14	
26711Y-05-04Z	-	1/2"X20	6	04		15.5	9.5	17	
26711Y-05-05Z *	-	1/2"X20	8	05		15.5	9.5	17	
26711Y-05-06Z	26712Y-05-06Z	1/2"X20	10	06		15.5	9.5	17	
26711Y-06-04Z *	-	9/16"X18	6	04		15.5	10	19	
26711Y-06-05Z	-	9/16"X18	8	05		15.5	10	19	
26711Y-06-06Z *	26712Y-06-06Z	9/16"X18	10	06		15.5	10	19	
26711Y-06-08Z	26712Y-06-08Z	9/16"X18	12	08		15.5	10	19	
26711Y-08-06Z *	26712Y-08-06Z	3/4"X16	10	06		17.5	11	22	
26711Y-08-08Z *	26712Y-08-08Z *	3/4"X16	12	08		18.5	11	22	
26711Y-08-10Z	26712Y-08-10Z	3/4"X16	16	10		18	11	22	
26711Y-10-08Z *	26712Y-10-08Z	7/8"X14	12	08		19	13	27	
26711Y-10-10Z *	26712Y-10-10Z *	7/8"X14	16	10		19.5	13	27	
26711Y-10-12Z	26712Y-10-12Z	7/8"X14	20	12		20	13	27	
26711Y-12-08TZ	26712Y-12-08TZ	1.1/16"X12	12	08		19.5	15	32	
26711Y-12-10Z	26712Y-12-10Z	1.1/16"X12	16	10		21	14.5	32	
26711Y-12-12Z *	26712Y-12-12Z *	1.1/16"X12	20	12		21.5	14.5	32	
26711Y-12-16Z	26712Y-12-16Z	1.1/16"X12	25	16		23	15	32	
26711Y-14-12Z	26712Y-14-12Z	1.3/16"X12	20	12		21.5	15	36	
26711Y-16-12TZ	26712Y-16-12TZ	1.5/16"X12	20	12		18.5	16	41	
26711Y-16-16Z *	26712Y-16-16Z *	1.5/16"X12	25	16		23	15.2	41	
26711Y-16-20Z	26712Y-16-20Z	1.5/16"X12	32	20		24/26.6	15.2	41	
26711Y-20-16TZ	26712Y-20-16TZ	1.5/8"X12	25	16		23	16	50	
26711Y1-20-20WZ * +	-	1.5/8"X12	32	20		24.5	16	50	
26711Y-20-20WZ * ++	26712Y-20-20WZ	1.5/8"X12	32	20		24.5/27.1	16	50	
26711Y1-24-20WZ +	-	1.7/8"X12	32	20		26.5	18.6	60	
26711Y-24-20WZ ++	26712Y-24-20WZ	1.7/8"X12	32	20		26.5/29.1	18.6	60	
26711Y-24-24WZ	26712Y-24-24WZ	1.7/8"X12	40	24		26.5/29.5	18.6	60	
26711Y-32-24TZ	26712Y-32-24TZ	2.1/2"X12	40	24		27/30	23.5	75	
26711Y-32-32TZ	26712Y-32-32TZ	2.1/2"X12	50	32		27/31.4	23.5	75	

- The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.
- Part no. marked with "*" is recommended.
- Marked with "+" design for GH781, GH663, FC686, EC110, EC881 hose, Marked with "++" design for GH793, EC210, EC215 hose.
- The recommended match hoses for 1 piece braided fittings are : FC687/EC115-16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425-16 and smaller sizes; GH506/EC512-12 and larger sizes with skive crimping.
- Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z/TZ/WZ	26711Y-08-08Z
304 stainless steel	SR/SRT/SRW	26711Y-08-08SR
316L stainless steel	SV/SVT/SVW	26711Y-08-08SV
316Ti stainless steel	SY/SYT/SYW	26711Y-08-08SY

- Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	26711Y-08-08Z	96	360
Durakote plating	ZD	26711Y-08-08ZD	360	720
Zinc-nickel plating	ZN	26711Y-08-08ZN	1000	-