


HOSE FITTING

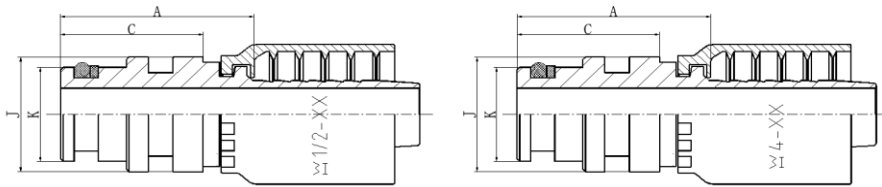

SAE STAPLE-LOK MALE

67011Y

67012Y

END REF. SAE J1467

PART NO.			HOSE SIZE		O-RING	DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	J	K
67011Y-04-04Z *	-		6	04	O06.0X2.0	34	27.74	14.9	9.9
67011Y-06-06Z	67012Y-06-06Z		10	06	O10.0X2.0	34/36.5	27.74	19.9	13.9
67011Y-08-08Z *	67012Y-08-08Z		12	08	O13.0X2.5	35	27.74	23.9	17.9
67011Y-12-12Z *	67012Y-12-12Z		20	12	O19.0X2.5	36.5	27.74	28.9	23.9
67011Y-16-16Z	67012Y-16-16Z		25	16	O25.0X2.5	43	33.9	38.8	30.9
67011Y1-20-20Z +	-		32	20	O33.0X2.5	47	34.5	45.9	37.9
67011Y-20-20Z ++	67012Y-20-20Z		32	20	O33.0X2.5	47/49.1	34.5	45.9	37.9
67011Y-24-24Z	67012Y-24-24Z		40	24	O40.0X3.0	51/54	38	54.9	46.9
67011Y-32-32Z	67012Y-32-32Z		50	32	O50.0X3.0	51/55	38	63.9	55.9

1. The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.
2. Part no. marked with "*" is recommended.
3. Marked with "+" design for GH781, GH663, FC686, EC110, EC881 hose, Marked with "++" design for GH793, EC210, EC215 hose.
4. The recommended match hoses for 1 piece braided fittings are : FC687/EC115-16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425-16 and smaller sizes; GH506/EC512-12 and larger sizes with skive crimping.
5. Material options for fitting and the O-ring.

Fitting material	O-ring material	Part. No. suffix	Part No. example
Carbon steel (Default)	NBR	Z	67011Y-08-08Z
304 stainless steel	Viton	SR	67011Y-08-08SR
316L stainless steel	Viton	SV	67011Y-08-08SV
316Ti stainless steel	Viton	SY	67011Y-08-08SY

6. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	67011Y-08-08Z	96	360
Durakote plating	ZD	67011Y-08-08ZD	360	720
Zinc-nickel plating	ZN	67011Y-08-08ZN	1000	-