


HOSE FITTING

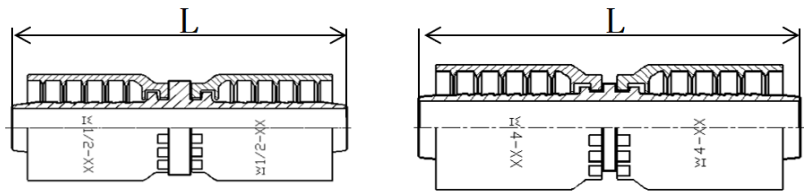

DOUBLE CONNECTOR

90011Y

90012Y

PART NO.			HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		L			
90011Y-04Z	-		6	04		69			
90011Y-05Z	-		8	05		69			
90011Y-06Z	90012Y-06Z		10	06		73/87			
90011Y-08Z	90012Y-08Z		12	08		77/91			
90011Y-10Z	90012Y-10Z		16	10		83/97			
90011Y-12Z	90012Y-12Z		20	12		93/110			
90011Y-16Z *	90012Y-16Z *		25	16		114/136			
90011Y1-20Z * +	-		32	20		132			
90011Y-20Z * ++	90012Y-20Z *		32	20		132/153			
90011Y-24Z	90012Y-24Z		40	24		162/170			
90011Y-32Z	90012Y-32Z		50	32		170/178			

1. The dimension L before "/" is for braided hose fitting and after "/" is for spiral hose fitting.
2. Part no. marked with "*" is recommended.
3. Marked with "+" design for GH781, GH663, FC686, EC110, EC881 hose, Marked with "++" design for GH793, EC210, EC215 hose.
4. The recommended match hoses for 1 piece braided fittings are : FC687/EC115-16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425-16 and smaller sizes; GH506/EC512-12 and larger sizes with skive crimping.
5. Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	90012Y-16Z
304 stainless steel	SR	90012Y-16SR
316L stainless steel	SV	90012Y-16SV
316Ti stainless steel	SY	90012Y-16SY

6. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	90012Y-16Z	96	360
Durakote plating	ZD	90012Y-16ZD	360	720
Zinc-nickel plating	ZN	90012Y-16ZN	1000	-