


HOSE FITTING

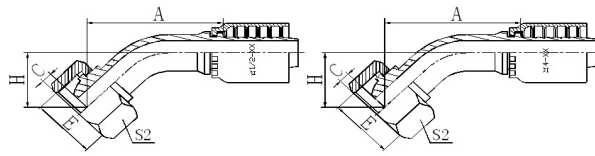

45° METRIC FEMALE 24° MULTISEAL S SERIES

20541CY

20542CY

PART NO.		THREAD E	HOSE SIZE		TUBE O.D.	DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	H	S2
20541CY-16-04TZ	-	M16X1.5	6	04	8	37.4	3.5	15.3	19
20541CY-18-04TZ	-	M18X1.5	6	04	10	38.1	3	16	22
20541CY-20-06TZ	20542CY-20-06TZ	M20X1.5	10	06	12	41.6	4.5	17.6	24
20541CY-24-08TZ *	20542CY-24-08TZ	M24X1.5	12	08	16	47.7	5	21.5	30

1. Part no. marked with "*" is recommended.

2. The recommended match hoses for 1 piece braided fittings are : FC687/EC115-16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425-16 and smaller sizes; GH506/EC512-12 and larger sizes with skive crimping.

3. Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	TZ	20541CY-24-08TZ
304 stainless steel	SRT	20541CY-24-08SRT
316L stainless steel	SVT	20541CY-24-08SVT
316Ti stainless steel	SYT	20541CY-24-08SYT

4. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	20541CY-24-08TZ	96	360
Durakote plating	ZD	20541CY-24-08TZD	360	720
Zinc-nickel plating	ZN	20541CY-24-08TZN	1000	-