


HOSE FITTING

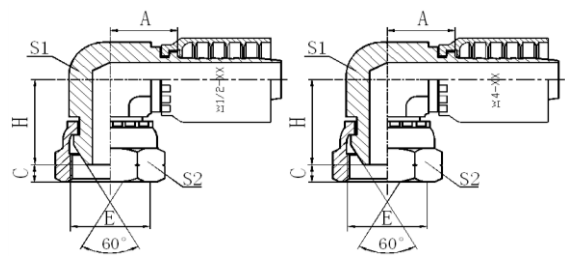

22691KY

22692KY

90° BSP COMPACT FEMALE 60° CONE

REF. ISO 12151-6

PART NO.		THREAD E	HOSE SIZE		DIMENSIONS				
BRAIDED	SPIRAL		DN	DASH	A	C	H	S1	S2
22691KY-04-04Z	-	G1/4"X19	6	04	17.5	5.5	18.5	11	19
22691KY-06-04Z	-	G3/8"X19	6	04	20	6.3	24	16	22
22691KY-06-05Z	-	G3/8"X19	8	05	20	6.3	24	16	22
22691KY-06-06Z	22692KY-06-06Z	G3/8"X19	10	06	20	6.3	24	16	22
22691KY-08-06Z	22692KY-08-06Z	G1/2"X14	10	06	23	7.5	28.5	19	27
22691KY-08-08Z	22692KY-08-08Z	G1/2"X14	12	08	23.5	7.5	28.5	19	27
22691KY-10-10Z	22692KY-10-10Z	G5/8"X14	16	10	24.5	9.5	30.5	22	30
22691KY-12-12Z	22692KY-12-12Z	G3/4"X14	20	12	27.5	10.9	33	27	32
22691KY-16-16Z	22692KY-16-16Z	G1"X11	25	16	43	11.7	38.5	33	41

1. The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.
2. Part no. marked with "*" is recommended.
3. The recommended match hoses for 1 piece braided fittings are : FC687/EC115-16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425-16 and smaller sizes; GH506/EC512-12 and larger sizes with skive crimping.
4. Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	22691KY-08-08Z
304 stainless steel	SR	22691KY-08-08SR
316L stainless steel	SV	22691KY-08-08SV
316Ti stainless steel	SY	22691KY-08-08SY

5. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	22691KY-08-08Z	96	360
Durakote plating	ZD	22691KY-08-08ZD	360	720
Zinc-nickel plating	ZN	22691KY-08-08ZN	1000	-