


HOSE FITTING

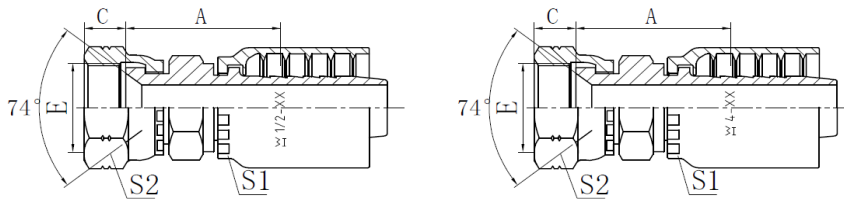

JIC FEMALE 74° CONE SEAT DOUBLE HEXAGON

REF. ISO 12151-5 / SAE J516

26711DY-SM

26712DY-SM

PART NO.		THREAD E	HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	S1	S2
NIPPLE WITH SMALLER HEX SIZE									
26711DY-04-04SMZ	-	7/16"-20	6	-04		20	9	12	14
26711DY-06-04SMZ	-	9/16"-18	6	-04		21	10	14	19
26711DY-06-06SMZ *	26712DY-06-06SMZ	9/16"-18	10	-06		21	10	17	19
26711DY-08-06SMZ	26712DY-08-06SMZ	3/4"-16	10	-06		24.5	11	19	22
26711DY-08-08SMZ *	26712DY-08-08SMZ	3/4"-16	12	-08		23.5	11	19	22
26711DY-10-08SMZ	26712DY-10-08SMZ	7/8"-14	12	-08		26	13	22	27
26711DY-10-10SMZ	26712DY-10-10SMZ	7/8"-14	16	-10		27	13	22	27
26711DY-12-08SMZ *	26712DY-12-08SMZ	1.1/16"-12	12	-08		29.5	15	27	32
26711DY-12-12SMZ *	26712DY-12-12SMZ	1.1/16"-12	20	-12		31.5	15	27	32
26711DY-16-16SMWZ	26712DY-16-16SMWZ	1.5/16"-12	25	-16		37.5	15.2	32	41
26711DY1-20-20SMWZ +	-	1.5/8"-12	32	-20		41	16	41	50
26711DY-20-20SMWZ ++	26712DY-20-20SMWZ	1.5/8"-12	32	-20		41/45	16	41	50
26711DY-24-24SMWZ	26712DY-24-24SMWZ	1.7/8"-12	38	-24		42/46	18.6	46	60
26711DY-32-32SMWZ	26712DY-32-32SMWZ	2.1/2"-12	50	-32		45/50	23.5	65	75

1. The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.
2. Part no. marked with "*" is recommended.
3. Marked with "+" design for GH781, GH663, FC686, EC110, EC881 hose, Marked with "++" design for GH793, EC210, EC215 hose.
4. The recommended match hoses for 1 piece braided fittings are : FC687/EC115-16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425-16 and smaller sizes; GH506/EC512-12 and larger sizes with skive crimping.
5. Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z/WZ	26711DY-08-08Z
304 stainless steel	SR/SRW	26711DY-08-08SR
316L stainless steel	SV/SVW	26711DY-08-08SV
316Ti stainless steel	SY/SYW	26711DY-08-08SY

6. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	26711DY-08-08Z	96	360
Durakote plating	ZD	26711DY-08-08ZD	360	720
Zinc-nickel plating	ZN	26711DY-08-08ZN	1000	-