


PUSH-ON FITTING

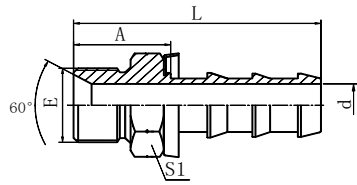

BSP MALE 60° CONE SEAT

12610A

REF. ISO 12151-6

PART NO.	E THREAD E	HOSE SIZE			DIMENSIONS			
		DN	DASH		A	L	S1	d
12610A-04-04Z	G1/4"X19	6	04		20	38	19	4.3
12610A-06-06Z	G3/8"X19	10	06		24	45.5	22	7.5
12610A-08-08Z	G1/2"X14	12	08		28.5	54	27	9.9
12610A-12-12Z	G3/4"X14	20	12		32	69.5	32	15.5

1. Material options for nipple.

Nipple material	Part. No. suffix	Part No. example
Carbon steel (Default)	TZ/WZ	12610A-08-08Z
304 stainless steel	SRT/SRW	12610A-08-08SR
316L stainless steel	SVT/SVW	12610A-08-08SV
316Ti stainless steel	SYT/SYW	12610A-08-08SY

2. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust(Hours)
Cr3+ plating (Default)	Z	12610A-08-08Z	96	360
Durakote plating	ZD	12610A-08-08ZD	360	720
Zinc-nickel plating	ZN	12610A-08-08ZN	1000	-