
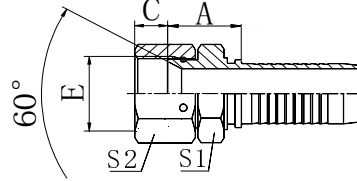


HOSE FITTING

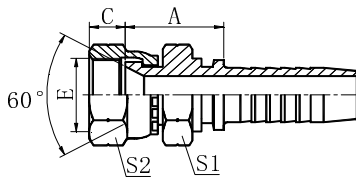

JIS GAS FEMALE 60° CONE SEAT

REF. JIS B8363

29611
29612

29611-W
29612-W

PART NO.		THREAD E	HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	S1	S2
29611-02-03Z	-	G1/8"X28	5	03		20	6.5	14	14
29611-04-04Z *	-	G1/4"X19	6	04		21	8	19	19
29611-04-05Z	-	G1/4"X19	8	05		21	8	19	19
29611-06-04Z	-	G3/8"X19	6	04		23	9	22	22
29611-06-06Z *	29612-06-06Z	G3/8"X19	10	06		23	9	22	22
29611-08-06Z	29612-08-06Z	G1/2"X14	10	06		28	12	27	27
29611-08-08Z *	29612-08-08Z	G1/2"X14	12	08		26.5	12	27	27
29611-10-10Z	29612-10-10Z	G5/8"X14	16	10		30.5	11.5	30	30
29611-12-10Z	29612-12-10Z	G3/4"X14	16	10		30	13.5	32	32
29611-12-12Z	29612-12-12Z	G3/4"X14	20	12		30.5	13.5	32	32
29611-16-16Z	29612-16-16Z	G1"X11	25	16		32	16	41	41
29611-20-20WZ	29612N-20-20WZ	G1.1/4"X11	32	20		43/45.6	18.6	50	50
29611-24-24WZ	29612N-24-24WZ	G1.1/2"X11	40	24		43.5/46.5	19	55	55
29611-32-32WZ	29612N-32-32WZ	G2"X11	50	32		46.5/50.9	23	70	70

1. The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.
2. Part no. marked with "*" is recommended.
3. Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z/WZ	29611-08-08Z
304 stainless steel	SR/SRW	29611-08-08SR
316L stainless steel	SV/SVW	29611-08-08SV
316Ti stainless steel	SY/SYW	29611-08-08SY

4. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	29611-08-08Z	96	360
Durakote plating	ZD	29611-08-08ZD	360	720
Zinc-nickel plating	ZN	29611-08-08ZN	1000	-