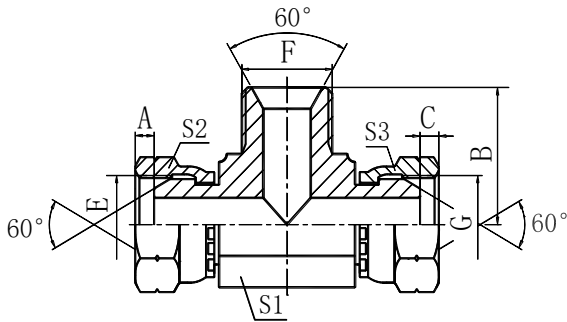


ADAPTER**EB**BSP FEMALE 60° CONE / BSP MALE 60° SEAT
BRANCH TEE

PART NO.	THREAD			DIMENSIONS					
	E	F	G	A,C	B	S1	S2	S3	
EB-02Z	G1/8"X28	G1/8"X28	G1/8"X28	5.5	19.5	11	14	14	
EB-04Z	G1/4"X19	G1/4"X19	G1/4"X19	5.5	24.5	14	19	19	
EB-06Z	G3/8"X19	G3/8"X19	G3/8"X19	6.3	27.5	16	22	22	
EB-08Z	G1/2"X14	G1/2"X14	G1/2"X14	7.5	34.5	22	27	27	
EB-10Z	G5/8"X14	G5/8"X14	G5/8"X14	9.5	35	22	30	30	
EB-12Z	G3/4"X14	G3/4"X14	G3/4"X14	10.9	40	27	32	32	
EB-16Z	G1"X11	G1"X11	G1"X11	11.7	46	33	41	41	
EB-20Z	G1.1/4"X11	G1.1/4"X11	G1.1/4"X11	10.1	50.5	41	50	50	
EB-24Z	G1.1/2"X11	G1.1/2"X11	G1.1/2"X11	12.5	57.5	48	55	55	
EB-32Z	G2"X11	G2"X11	G2"X11	16.1	72.5	63	70	70	

1. Material options for connector.

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	EB-08Z
304 stainless steel	SR	EB-08SR
316L stainless steel	SV	EB-08SV
316Ti stainless steel	SY	EB-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust(Hours)
Cr3+ plating (Default)	Z	EB-08Z	96	360
Durakote plating	ZD	EB-08ZD	360	720
Zinc-nickel plating	ZN	EB-08ZN	1000	-