


ADAPTER

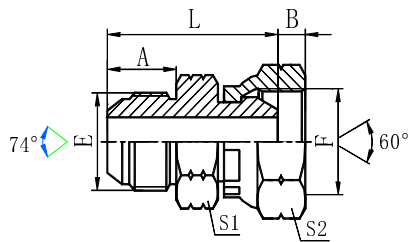

2JB

JIC MALE 74° CONE/BSP FEMALE 60° CONE

PART NO.	THREAD		DIMENSIONS							
	E	F			A	B	L	S1	S2	
2JB-04Z	7/16"X20	G1/4"X19			14	5.5	31	12	19	
2JB-04-02Z	7/16"X20	G1/8"X28			14	5.5	29	14	14	
2JB-04-06Z	7/16"X20	G3/8"X19			14	6.3	32.5	17	22	
2JB-05-02Z	1/2"X20	G1/8"X28			14	5.5	29	14	14	
2JB-05-04Z	1/2"X20	G1/4"X19			14	5.5	31	14	19	
2JB-06Z	9/16"X18	G3/8"X19			14.1	6.3	32.5	17	22	
2JB-06-04Z	9/16"X18	G1/4"X19			14.1	5.5	31	17	19	
2JB-06-08Z	9/16"X18	G1/2"X14			14.1	7.5	34	19	27	
2JB-08Z	3/4"X16	G1/2"X14			16.7	7.5	38.5	22	27	
2JB-08-04Z	3/4"X16	G1/4"X19			16.7	5.5	35.5	22	19	
2JB-08-06Z	3/4"X16	G3/8"X19			16.7	6.3	37	22	22	
2JB-08-12Z	3/4"X16	G3/4"X14			16.7	10.9	42	27	32	
2JB-10Z	7/8"X14	G5/8"X14			19.3	9.5	42	24	30	
2JB-10-08Z	7/8"X14	G1/2"X14			19.3	7.5	41	24	27	
2JB-12Z	1.1/16"X12	G3/4"X14			21.9	10.9	47	30	32	
2JB-12-08Z	1.1/16"X12	G1/2"X14			21.9	7.5	46	30	27	
2JB-12-16Z	1.1/16"X12	G1"X11			21.9	11.7	49.5	32	41	
2JB-16Z	1.5/16"X12	G1"X11			23.1	11.7	51	36	41	
2JB-20Z	1.5/8"X12	G1.1/4"X11			24.3	10.1	57	46	50	
2JB-20-16Z	1.5/8"X12	G1"X11			24.3	11.7	53.5	46	41	
2JB-24Z	1.7/8"X12	G1.1/2"X11			27.5	12.5	62.5	50	55	
2JB-24-20Z	1.7/8"X12	G1.1/4"X11			27.5	10.1	62.5	50	50	

1. Material options for connector

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	2JB-08Z
304 stainless steel	SR	2JB-08SR
316L stainless steel	SV	2JB-08SV
316Ti stainless steel	SY	2JB-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	2JB-08Z	96	360
Durakote plating	ZD	2JB-08ZD	360	720
Zinc-nickel plating	ZN	2JB-08ZN	1000	-