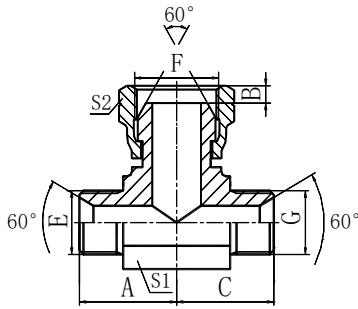


ADAPTER**BB**

BSP MALE 60° SEAT / BSP FEMALE 60° CONE BRANCH TEE

PART NO.	THREAD				DIMENSIONS				
	E	F	G		A	B	C	S1	S2
BB-02Z	G1/8"X28	G1/8"X28	G1/8"X28		19.8	5.5	19.8	11	14
BB-04Z	G1/4"X19	G1/4"X19	G1/4"X19		24.5	5.5	24.5	14	19
BB-06Z	G3/8"X19	G3/8"X19	G3/8"X19		27.5	6.3	27.5	16	22
BB-08Z	G1/2"X14	G1/2"X14	G1/2"X14		34.5	7.5	34.5	22	27
BB-12Z	G3/4"X14	G3/4"X14	G3/4"X14		40	10.9	40	27	32
BB-16Z	G1"X11	G1"X11	G1"X11		46	11.7	46	33	41
BB-20Z	G1.1/4"X11	G1.1/4"X11	G1.1/4"X11		50.5	10.1	50.5	41	50
BB-24Z	G1.1/2"X11	G1.1/2"X11	G1.1/2"X11		57.5	12.5	57.5	48	55
BB-32Z	G2"X11	G2"X11	G2"X11		72.5	16.1	72.5	63	70

1. Material options for connector.

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	BB-08Z
304 stainless steel	SR	BB-08SR
316L stainless steel	SV	BB-08SV
316Ti stainless steel	SY	BB-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust(Hours)
Cr3+ plating (Default)	Z	BB-08Z	96	360
Durakote plating	ZD	BB-08ZD	360	720
Zinc-nickel plating	ZN	BB-08ZN	1000	-