


HOSE FITTING

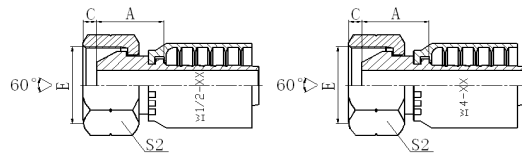

22611Y

22612Y

BSP FEMALE 60° CONE

REF. ISO 12151-6

PART NO.		THREAD E	HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	S2	
22611Y-02-03Z	-	G1/8"X28	5	03		15	5.5	14	
22611Y-02-04Z	-	G1/8"X28	6	04		15.5	5.5	14	
22611Y-04-03Z	-	G1/4"X19	5	03		17.5	5.5	19	
22611Y-04-04Z *	-	G1/4"X19	6	04		18	5.5	19	
22611Y-04-05Z	-	G1/4"X19	8	05		18	5.5	19	
22611Y-04-06Z	22612Y-04-06Z	G1/4"X19	10	06		18	5.5	19	
22611Y-06-04Z	-	G3/8"X19	6	04		19	6.3	22	
22611Y-06-05Z	-	G3/8"X19	8	05		19	6.3	22	
22611Y-06-06Z *	22612Y-06-06Z	G3/8"X19	10	06		19.5	6.3	22	
22611Y-06-08Z	22612Y-06-08Z	G3/8"X19	12	08		19.5	6.3	22	
22611Y-08-06TZ	22612Y-08-06TZ	G1/2"X14	10	06		18.5	7.5	27	
22611Y-08-08Z *	22612Y-08-08Z *	G1/2"X14	12	08		21.5	7.5	27	
22611Y-10-08Z	22612Y-10-08Z	G5/8"X14	12	08		22	9.5	30	
22611Y-10-10Z	22612Y-10-10Z	G5/8"X14	16	10		23	9.5	30	
22611Y-12-08TZ	22612Y-12-08TZ	G3/4"X14	12	08		20	10.9	32	
22611Y-12-10Z	22612Y-12-10Z	G3/4"X14	16	10		24	10.9	32	
22611Y-12-12Z *	22612Y-12-12Z *	G3/4"X14	20	12		24	10.9	32	
22611Y-16-12TZ	22612Y-16-12TZ	G1"X11	20	12		23	11.7	41	
22611Y-16-16Z *	22612Y-16-16Z *	G1"X11	25	16		27	11.7	41	
22611Y-20-16TZ	22612Y-20-16TZ	G1.1/4"X11	25	16		27	10.1	50	
22611Y-20-20WZ * +	-	G1.1/4"X11	32	20		30.5	10.1	50	
22611Y-20-20WZ * ++	22612Y-20-20WZ	G1.1/4"X11	32	20		30.5/33.1	10.1	50	
22611Y-24-20TZ +	-	G1.1/2"X11	32	20		29.5	13	55	
22611Y-24-20TZ ++	22612Y-24-20TZ	G1.1/2"X11	32	20		29.5/32.1	13	55	
22611Y-24-24WZ *	22612Y-24-24WZ	G1.1/2"X11	40	24		32/25	12.5	55	
22611Y-32-24TZ	22612Y-32-24TZ	G2"X11	40	24		30/33	16.1	70	
22611Y-32-32WZ *	22612Y-32-32WZ	G2"X11	50	32		31/35.4	16.1	70	

- The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.
- Part no. marked with "*" is recommended.
- Marked with "+" design for GH781, GH663, FC686, EC110, EC881 hose, Marked with "++" design for GH793, EC210, EC215 hose.
- The recommended match hoses for 1 piece braided fittings are : FC687/EC115- 16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425- 16 and smaller sizes; GH506/EC512- 12 and larger sizes with skive crimping.
- Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z/TZ/WZ	22611Y-08-08Z
304 stainless steel	SR/SRT/SRW	22611Y-08-08SR
316L stainless steel	SV/SVT/SVW	22611Y-08-08SV
316Ti stainless steel	SY/SYT/SYW	22611Y-08-08SY

6. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	22611Y-08-08Z	96	360
Durakote plating	ZD	22611Y-08-08ZD	360	720
Zinc-nickel plating	ZN	22611Y-08-08ZN	1000	-