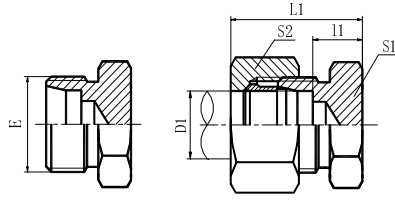


**ADAPTER**

METRIC MALE 24° CONE PLUG

**4C****4C-RNW****4D****4D-RNW**

| PART NO. |           | THREAD E | D1<br>TUBE O.D. | DIMENSIONS |    |    |    |  |  |
|----------|-----------|----------|-----------------|------------|----|----|----|--|--|
| BODY     | ASSEMBLY  |          |                 | I1         | L1 | S1 | S2 |  |  |
| L SERIES |           |          |                 |            |    |    |    |  |  |
| 4C-12Z   | 4C-12RNWZ | M12x1.5  | 6               | 7          | 22 | 12 | 14 |  |  |
| 4C-14Z   | 4C-14RNWZ | M14x1.5  | 8               | 8          | 23 | 14 | 17 |  |  |
| 4C-16Z   | 4C-16RNWZ | M16x1.5  | 10              | 9          | 24 | 17 | 19 |  |  |
| 4C-18Z   | 4C-18RNWZ | M18x1.5  | 12              | 10         | 25 | 19 | 22 |  |  |
| 4C-22Z   | 4C-22RNWZ | M22x1.5  | 15              | 11         | 26 | 24 | 27 |  |  |
| 4C-26Z   | 4C-26RNWZ | M26X1.5  | 18              | 11.5       | 28 | 27 | 32 |  |  |
| 4C-30Z   | 4C-30RNWZ | M30x2    | 22              | 13.5       | 30 | 32 | 36 |  |  |
| 4C-30DZ  | 4C-30RNWZ | M30x1.5  | 22              | 13.5       | 30 | 32 | 36 |  |  |
| 4C-36Z   | 4C-36RNWZ | M36x2    | 28              | 14.5       | 31 | 41 | 41 |  |  |
| 4C-36DZ  | 4C-36RNWZ | M36x1.5  | 28              | 14.5       | 31 | 41 | 41 |  |  |
| 4C-45Z   | 4C-45RNWZ | M45X2    | 35              | 14.5       | 36 | 46 | 50 |  |  |
| 4C-45DZ  | 4C-45RNWZ | M45X1.5  | 35              | 15.5       | 36 | 46 | 50 |  |  |
| 4C-52Z   | 4C-52RNWZ | M52X2    | 42              | 16         | 39 | 55 | 60 |  |  |
| S SERIES |           |          |                 |            |    |    |    |  |  |
| 4D-14Z   | 4D-14RNWZ | M14X1.5  | 6               | 11         | 26 | 14 | 17 |  |  |
| 4D-16Z   | 4D-16RNWZ | M16X1.5  | 8               | 13         | 28 | 17 | 19 |  |  |
| 4D-18Z   | 4D-18RNWZ | M18x1.5  | 10              | 12.5       | 29 | 19 | 22 |  |  |
| 4D-20Z   | 4D-20RNWZ | M20x1.5  | 12              | 14.5       | 31 | 22 | 24 |  |  |
| 4D-22Z   | 4D-22RNWZ | M22x1.5  | 14              | 16         | 34 | 24 | 27 |  |  |
| 4D-24Z   | 4D-24RNWZ | M24x1.5  | 16              | 15.5       | 34 | 27 | 30 |  |  |
| 4D-30Z   | 4D-30RNWZ | M30x2    | 20              | 17.5       | 39 | 32 | 36 |  |  |
| 4D-36Z   | 4D-36RNWZ | M36x2    | 25              | 20         | 44 | 41 | 46 |  |  |
| 4D-42Z   | 4D-42RNWZ | M42x2    | 30              | 20.5       | 47 | 46 | 50 |  |  |
| 4D-52Z   | 4D-52RNWZ | M52X2    | 38              | 23         | 54 | 55 | 60 |  |  |

## 1. Material options for connector body and nut.

| Connector body and nut material | Part. No. suffix | Part No. example |
|---------------------------------|------------------|------------------|
| Carbon steel (Default)          | Z                | 4C-18Z           |
| 304 stainless steel             | SR               | 4C-18SR          |
| 316L stainless steel            | SV               | 4C-18SV          |
| 316Ti stainless steel           | SY               | 4C-18SY          |

## 2. Plating options and performance for carbon steel connectors.

| Plating method         | Part. No. suffix | Part No. example | White rust (Hours) | Red rust (Hours) |
|------------------------|------------------|------------------|--------------------|------------------|
| Cr3+ plating (Default) | Z                | 4C-18Z           | 96                 | 360              |
| Durakote plating       | ZD               | 4C-18ZD          | 360                | 720              |
| Zinc-nickel plating    | ZN               | 4C-18ZN          | 1000               | -                |