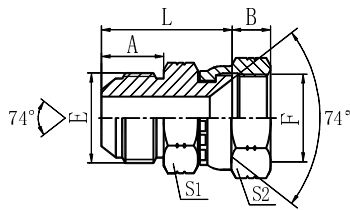


ADAPTER**2J**

JIC MALE 74° CONE / JIC FEMALE 74° SEAT

PART NO.	THREAD				DIMENSIONS					
	E	F			A	B	L	S1	S2	
2J-04Z	7/16"X20	7/16"X20			14	9	28	12	14	
2J-04-05Z	7/16"X20	1/2"X20			14	9.5	28.5	12	17	
2J-04-06Z	7/16"X20	9/16"X18			14	10	28.5	14	19	
2J-04-08Z	7/16"X20	3/4"X16			14	11	30.5	19	22	
2J-05Z	1/2"X20	1/2"X20			14	9.5	28.5	14	17	
2J-05-06Z	1/2"X20	9/16"X18			14	10	28.5	14	19	
2J-05-08Z	1/2"X20	3/4"X16			14	11	30.5	19	22	
2J-06Z	9/16"X18	9/16"X18			14.1	10	29	17	19	
2J-06-08Z	9/16"X18	3/4"X16			14.1	11	31	19	22	
2J-06-10Z	9/16"X18	7/8"X14			14.1	13	33.5	22	27	
2J-08Z	3/4"X16	3/4"X16			16.7	11	36	22	22	
2J-08-06Z	3/4"X16	9/16"X18			16.7	10	34	22	19	
2J-08-10Z	3/4"X16	7/8"X14			16.7	13	36.5	22	27	
2J-08-12Z	3/4"X16	1.1/16"X12			16.7	14.5	39.5	27	32	
2J-10Z	7/8"X14	7/8"X14			19.3	13	39	24	27	
2J-10-08Z	7/8"X14	3/4"X16			19.3	11	38	24	22	
2J-10-12Z	7/8"X14	1.1/16"X12			19.3	14.5	42	27	32	
2J-12Z	1.1/16"X12	1.1/16"X12			21.9	14.5	44.5	30	32	
2J-12-10Z	1.1/16"X12	7/8"X14			21.9	13	43.5	30	27	
2J-12-16Z	1.1/16"X12	1.5/16"X12			21.9	15.18	45.5	36	41	
2J-16Z	1.5/16"X12	1.5/16"X12			23.1	15.18	46.5	36	41	
2J-16-20Z	1.5/16"X12	1.5/8"X12			23.1	16.1	53	41	50	
2J-20Z	1.5/8"X12	1.5/8"X12			24.3	16.1	54	46	50	
2J-20-24Z	1.5/8"X12	1.7/8"X12			24.3	18.6	55.5	46	60	
2J-24Z	1.7/8"X12	1.7/8"X12			27.5	18.6	61	50	60	
2J-24-32Z	1.7/8"X12	2.1/2"X12			27.5	23.8	62	65	75	
2J-32Z	2.1/2"X12	2.1/2"X12			33.9	23.8	69.5	65	75	

1. Material options for connector

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	2J-08Z
304 stainless steel	SR	2J-08SR
316L stainless steel	SV	2J-08SV
316Ti stainless steel	SY	2J-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	2J-08Z	96	360
Durakote plating	ZD	2J-08ZD	360	720
Zinc-nickel plating	ZN	2J-08ZN	1000	-