


ADAPTER

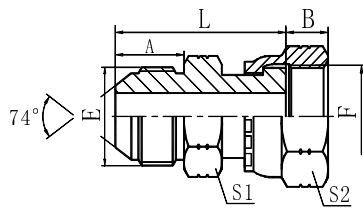

2JF

JIC MALE 74° CONE/ORFS FEMALE

PART NO.	THREAD		DIMENSIONS							
	E	F			A	B	L	S1	S2	
2JF-04Z	7/16"X20	9/16X18			14	8.2	35.5	14	17	
2JF-06Z	9/16"X18	11/16"X16			14.1	9	38.5	17	22	
2JF-08Z	3/4"X16	13/16"X16			16.7	11	45	22	27	
2JF-10Z	7/8"X14	1"X14			19.3	13	51.5	24	30	
2JF-12Z	1.1/16"X12	1.3/16"X12			21.9	14.5	58	30	36	
2JF-16Z	1.5/16"X12	1.7/16"X12			23.1	15	62	36	41	
2JF-20Z	1.5/8"X12	1.11/16"X12			24.3	15	68.5	46	50	

1. Material options for connector

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	2JF-08Z
304 stainless steel	SR	2JF-08SR
316L stainless steel	SV	2JF-08SV
316Ti stainless steel	SY	2JF-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	2JF-08Z	96	360
Durakote plating	ZD	2JF-08ZD	360	720
Zinc-nickel plating	ZN	2JF-08ZN	1000	-