


ADAPTER

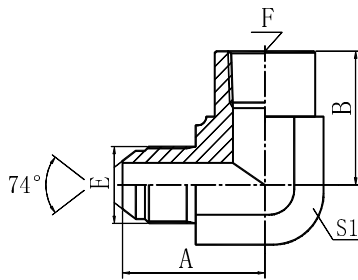

5JT9

JIC MALE 74° CONE/BSPT FEMALE 90° ELBOW

PART NO.	THREAD				DIMENSIONS					
	E	F			A	B	S1			
5JT9-04-02Z	7/16"x20	Rc1/8"x28			27.5	20	16			
5JT9-04Z	7/16"x20	Rc1/4"x19			30	25	19			
5JT9-05-04Z	1/2"x20	Rc1/4"x19			30	25	19			
5JT9-06Z	9/16"x18	Rc3/8"x19			33.5	27	24			
5JT9-06-04Z	9/16"x18	Rc1/4"x19			30.5	25	19			
5JT9-08Z	3/4"x16	Rc1/2"x14			39.5	31.5	30			
5JT9-08-06Z	3/4"x16	Rc3/8"x19			36	27	24			
5JT9-10-08Z	7/8"x14	Rc1/2"x14			42.5	31.5	30			
5JT9-12Z	1.1/16"x12	Rc3/4"x14			48	37	33			
5JT9-12-08Z	1.1/16"x12	Rc1/2"x14			46.2	31.5	30			
5JT9-16Z	1.5/16"x12	Rc1"x11			54	43	41			
5JT9-20Z	1.5/8"x12	Rc1.1/4"x11			62	46	50			
5JT9-24Z	1.7/8"x12	Rc1.1/2"x11			74.5	55	63			

1. Material options for connector

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	5JT9-08Z
304 stainless steel	SR	5JT9-08SR
316L stainless steel	SV	5JT9-08SV
316Ti stainless steel	SY	5JT9-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	5JT9-08Z	96	360
Durakote plating	ZD	5JT9-08ZD	360	720
Zinc-nickel plating	ZN	5JT9-08ZN	1000	-