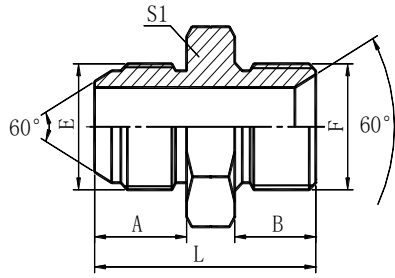


ADAPTER**1SB**

JIS GAS MALE 60°CONE/BSP MALE 60°SEAT

PART NO.	THREAD				DIMENSIONS				
	E	F			A	B	L	S1	
1SB-04Z	G1/4"X19	G1/4"X19			16	12	34	19	
1SB-04-06Z	G1/4"X19	G3/8"X19			16	13.5	37.5	22	
1SB-06Z	G3/8"X19	G3/8"X19			18	13.5	39.5	22	
1SB-06-04Z	G3/8"X19	G1/4"X19			18	12	36	19	
1SB-06-08Z	G3/8"X19	G1/2"X14			18	16	44	27	
1SB-08Z	G1/2"X14	G1/2"X14			20	16	46	27	
1SB-08-06Z	G1/2"X14	G3/8"X19			20	13.5	41.5	22	
1SB-08-12Z	G1/2"X14	G3/4"X14			20	18.5	49.5	32	
1SB-12Z	G3/4"X14	G3/4"X14			22	18.5	51.5	32	
1SB-12-06Z	G3/4"X14	G3/8"X19			22	13.5	45.5	30	
1SB-12-08Z	G3/4"X14	G1/2"X14			22	16	48	30	
1SB-12-16Z	G3/4"X14	G1"X11			22	20.5	55.5	41	
1SB-16Z	G1"X11	G1"X11			24	20.5	57.5	41	
1SB-16-08Z	G1"X11	G1/2"X14			24	16	51	36	
1SB-16-12Z	G1"X11	G3/4"X14			24	18.5	53.5	36	

1. Material options for connector.

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	1SB-08Z
304 stainless steel	SR	1SB-08SR
316L stainless steel	SV	1SB-08SV
316Ti stainless steel	SY	1SB-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust(Hours)
Cr3+ plating (Default)	Z	1SB-08Z	96	360
Durakote plating	ZD	1SB-08ZD	360	720
Zinc-nickel plating	ZN	1SB-08ZN	1000	-