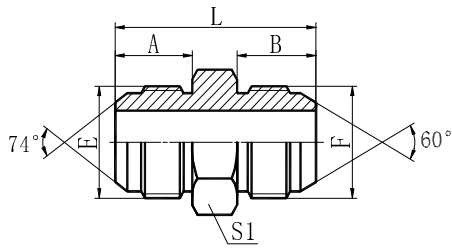


ADAPTER**1JK**

JIC MALE 74° CONE /JIS METRIC MALE 60° CONE

PART NO.	THREAD		DIMENSIONS							
	E	F			A	B	L	S1		
1JK-04-14Z	7/16"X20	M14X1.5			14	17	37	17		
1JK-06-18Z	9/16"X18	M18X1.5			14.1	18	38	19		
1JK-08-22Z	3/4"X16	M22X1.5			16.7	20	44.5	24		
1JK-10-24Z	7/8"X14	M24X1.5			19.3	21.5	51	27		
1JK-12-22Z	1.1/16"X12	M22X1.5			21.9	20	52	30		
1JK-12-24Z	1.1/16"X12	M24X1.5			21.9	21.5	53.5	30		
1JK-12-30Z	1.1/16"X12	M30X1.5			21.9	26	59	32		
1JK-16-33Z	1.5/16"X12	M33X1.5			23.1	30	64	36		
1JK-20-36Z	1.5/8"X12	M36X1.5			24.3	33	70	46		
1JK-24-42Z	1.7/8"X12	M42X1.5			27.5	36	79	50		

1. Material options for connector

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	1JK-08-22Z
304 stainless steel	SR	1JK-08-22SR
316L stainless steel	SV	1JK-08-22SV
316Ti stainless steel	SY	1JK-08-22SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	1JK-08-22Z	96	360
Durakote plating	ZD	1JK-08-22ZD	360	720
Zinc-nickel plating	ZN	1JK-08-22ZN	1000	-