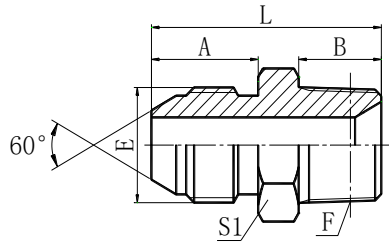


ADAPTER**1SN**

JIS GAS MALE 60° CONE/NPT MALE

PART NO.	THREAD				DIMENSIONS				
	E	F			A	B	L	S1	
1SN-04Z	G1/4"X19	Z1/4"X18			16	15	37	17	
1SN-04-02Z	G1/4"X19	Z1/8"X27			16	10.5	32.5	14	
1SN-06Z	G3/8"X19	Z3/8"X18			18	16	40	19	
1SN-06-04Z	G3/8"X19	Z1/4"X18			18	15	39	17	
1SN-08Z	G1/2"X14	Z1/2"X14			20	19.5	47.5	22	
1SN-08-06Z	G1/2"X14	Z3/8"X18			20	16	44	22	
1SN-12Z	G3/4"X14	Z3/4"X14			22	19.5	51.5	30	
1SN-12-08Z	G3/4"X14	Z1/2"X14			22	19.5	51.5	30	
1SN-16Z	G1"X11	Z1"X11.5			24	25.5	60.5	36	
1SN-16-12Z	G1"X11	Z3/4"X14			24	19.5	54.5	36	
1SN-20Z	G1.1/4"X11	Z1.1/4"X11.5			27	26.5	66.5	46	
1SN-20-16Z	G1.1/4"X11	Z1"X11.5			27	25.5	65.5	46	
1SN-24Z	G1.1/2"X11	Z1.1/2"X11.5			27	27.5	69.5	50	

1. Material options for connector.

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	1SN-08Z
304 stainless steel	SR	1SN-08SR
316L stainless steel	SV	1SN-08SV
316Ti stainless steel	SY	1SN-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust(Hours)
Cr3+ plating (Default)	Z	1SN-08Z	96	360
Durakote plating	ZD	1SN-08ZD	360	720
Zinc-nickel plating	ZN	1SN-08ZN	1000	-