


ADAPTER

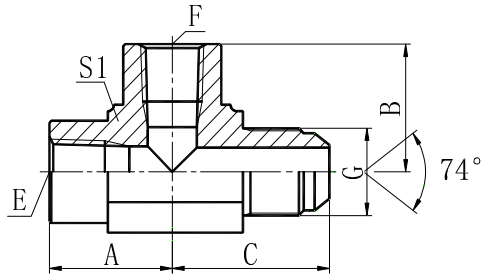

HNNJ

NPT FEMALE/JIC MALE 74° CONE RUN TEE

PART NO.	THREAD			DIMENSIONS						
	E	F	G			A	B	C	S1	
HNNJ-04Z	Z1/4"X18	Z1/4"X18	7/16"X20			22.4	22.4	29.5	19	
HNNJ-04-04-05Z	Z1/4"X18	Z1/4"X18	1/2"X20			22.4	22.4	29.5	19	
HNNJ-04-04-06Z	Z1/4"X18	Z1/4"X18	9/16"X18			22.4	22.4	31.2	19	
HNNJ-06Z	Z3/8"X18	Z3/8"X18	9/16"X18			25.9	25.9	33.5	24	
HNNJ-06-06-08Z	Z3/8"X18	Z3/8"X18	3/4"X16			25.9	25.9	36	24	
HNNJ-08Z	Z1/2"X14	Z1/2"X14	3/4"X16			31.2	31.2	39.5	30	
HNNJ-08-08-10Z	Z1/2"X14	Z1/2"X14	7/8"X14			31.2	31.2	42.5	30	
HNNJ-12Z	Z3/4"X14	Z3/4"X14	1.1/16"X12			34.5	34.5	48	33	
HNNJ-16Z	Z1"X11.5	Z1"X11.5	1.5/16"X12			41.1	41.1	55.1	41	

1. Material options for connector

Connector material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	HNNJ-08Z
304 stainless steel	SR	HNNJ-08SR
316L stainless steel	SV	HNNJ-08SV
316Ti stainless steel	SY	HNNJ-08SY

2. Plating options and performance for carbon steel connectors.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	HNNJ-08Z	96	360
Durakote plating	ZD	HNNJ-08ZD	360	720
Zinc-nickel plating	ZN	HNNJ-08ZN	1000	-