


HOSE FITTING

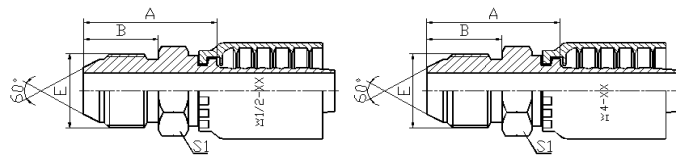

JIS BSPP MALE 60° CONE SEAT

19611Y**19612Y**

END REF. JIS B8363

PART NO.		THREAD E	HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	B	S1	
19611Y-04-04Z *	-	G1/4"X19	6	04		28.5	16	17	
19611Y-06-06Z *	19612Y-06-06Z	G3/8"X19	10	06		30.5	18	19	
19611Y-08-08Z *	19612Y-08-08Z	G1/2"X14	12	08		35	20	22	
19611Y-12-12Z	19612Y-12-12Z	G3/4"X14	20	12		40.5	22	30	
19611Y-16-16Z	19612Y-16-16Z	G1"X11	25	16		44	24	36	

1. Part no. marked with "*" is recommended.

2. The recommended match hoses for 1 piece braided fittings are : FC687/EC115-16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425-16 and smaller sizes; GH506/EC512-12 and larger sizes with skive crimping.

3. Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	19611Y-08-08Z
304 stainless steel	SR	19611Y-08-08SR
316L stainless steel	SV	19611Y-08-08SV
316Ti stainless steel	SY	19611Y-08-08SY

4. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	19611Y-08-08Z	96	360
Durakote plating	ZD	19611Y-08-08ZD	360	720
Zinc-nickel plating	ZN	19611Y-08-08ZN	1000	-