


HOSE FITTING

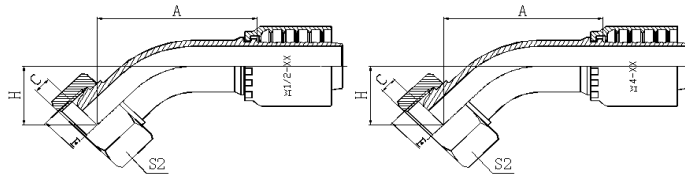

45° BSP FEMALE MULTISEAL

22141Y

22142Y

PART NO.		THREAD E	HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	H	S2
22141Y-02-04Z	-	G1/8"X28	6	04		43.7	2	21.6	14
22141Y-04-03Z	-	G1/4"X19	5	03		41.3	4	20.4	19
22141Y-04-04Z *	-	G1/4"X19	6	04		43.4	4	21.3	19
22141Y-06-05Z	-	G3/8"X19	8	05		46.2	5	22.9	22
22141Y-06-06Z *	22142Y-06-06Z	G3/8"X19	10	06		47.8	5	23.5	22
22141Y-06-08Z	22142Y-06-08Z	G3/8"X19	12	08		60.4	5	25.4	22
22141Y-08-04TZ	-	G1/2"X14	6	04		43.9	6	23.8	27
22141Y-08-06TZ	22142Y-08-06TZ	G1/2"X14	10	06		42.5	6	18.2	27
22141Y-08-08Z *	22142Y-08-08Z	G1/2"X14	12	08		62.1	6	27.2	27
22141Y-08-10Z	22142Y-08-10Z	G1/2"X14	16	10		72.8	6	28.5	27
22141Y-10-10Z	22142Y-10-10Z	G5/8"X14	16	10		73.2	8	28.9	30
22141Y-10-12Z	22142Y-10-12Z	G5/8"X14	20	12		79.8	8	32.5	30
22141Y-12-08TZ	22142Y-12-08TZ	G3/4"X14	12	08		63.2	9.5	28.3	32
22141Y-12-10Z	22142Y-12-10Z	G3/4"X14	16	10		70.4	9.5	29.6	32
22141Y-12-12Z	22142Y-12-12Z	G3/4"X14	20	12		80	9	33.2	32
22141Y-16-12Z	22142Y-16-12Z	G1"X11	20	12		81.6	11	33.5	41
22141Y-16-16Z	22142Y-16-16Z	G1"X11	25	16		89	10.5	34	41
22141Y-20-16TZ	22142Y-20-16TZ	G1.1/4"X11	25	16		87.1	9.1	32.9	50
22141Y1-20-20WZ +	-	G1.1/4"X11	32	20		99.1	9.1	38.4	50
22141Y-20-20WZ ++	22142Y-20-20WZ	G1.1/4"X11	32	20		99.1/101.7	9.1	38.4	50
22141Y-24-24WZ	22142Y-24-24WZ	G1.1/2"X11	40	24		119.8/122.8	11.5	49	55
22141Y-32-32WZ	22142Y-32-32WZ	G2"X11	50	32		138.4/142.8	15.3	56.2	70

- The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.
- Part no. marked with "*" is recommended.
- Marked with "+" design for GH781, GH663, FC686, EC110, EC881 hose, Marked with "++" design for GH793, EC210, EC215 hose.
- The recommended match hoses for 1 piece braided fittings are : FC687/EC115-16 and smaller sizes; GH663/EC881-20 and smaller sizes; FC686/EC210/EC215/GH781-24 and smaller sizes; EC110/GH793 whole sizes etc. and with non-skive crimping. For 1 piece spiral fittings are: 2755/GH493/EC640/GH425-16 and smaller sizes; GH506/EC512-12 and larger sizes with skive crimping.
- Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z/TZ/WZ	22141Y-08-08Z
304 stainless steel	SR/SRT/SRW	22141Y-08-08SR
316L stainless steel	SV/SVT/SVW	22141Y-08-08SV
316Ti stainless steel	SY/SYT/SYW	22141Y-08-08SY

- Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	22141Y-08-08Z	96	360
Durakote plating	ZD	22141Y-08-08ZD	360	720
Zinc-nickel plating	ZN	22141Y-08-08ZN	1000	-