


HOSE FITTING

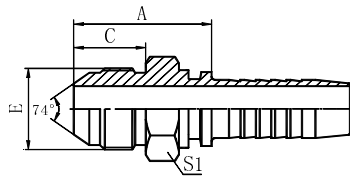

GB METRIC MALE 74° CONE

10711
10712

REF. GB/T 9065.5

PART NO.		THREAD E	HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	S1	
10711-10-02Z	-	M10X1	4	2		23	12.5	14	
10711-10-03Z	-	M10X1	5	3		23	12.5	14	
10711-12-03Z	-	M12X1.5	5	3		26.5	15.7	14	
10711-12-03CZ	-	M12X1.25	5	3		24.5	14	14	
10711-14-04Z *	-	M14X1.5	6	4		29.5	17	17	
10711-14-06Z	10712-14-06Z	M14X1.5	10	6		30.5	18	17	
10711-16-05Z *	-	M16X1.5	8	5		30.5	18	17	
10711-16-06Z	10712-16-06Z	M16X1.5	10	6		30.5	18	17	
10711-18-06Z *	10712-18-06Z	M18X1.5	10	6		30.5	18	19	
10711-22-08Z *	10712-22-08Z	M22X1.5	12	8		35	19.5	24	
10711-24-08Z	10712-24-08Z	M24X1.5	12	8		35.5	20	27	
10711-27-10Z	10712-27-10Z	M27X1.5	16	10		38	20	30	
10711-30-12Z	10712-30-12Z	M30X1.5	20	12		42.5	23	32	
10711-30-12EZ	10712-30-12EZ	M30X2	20	12		45.5	26	32	
10711-33-12Z	10712-33-12Z	M33X2	20	12		46	26	36	
10711-39-16Z	10712-39-16Z	M39X2	25	16		48	27.5	41	
10711-42-20Z	10712N-42-20Z	M42X2	32	20		52/54.6	28.5	46	
10711-45-20Z	10712N-45-20Z	M45X2	32	20		52/54.6	28.5	46	

1.The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.

2.Part no. marked with "*" is recommended.

3. Material options for nipple.

Nipple material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	10711-22-08Z
304 stainless steel	SR	10711-22-08SR
316L stainless steel	SV	10711-22-08SV
316Ti stainless steel	SY	10711-22-08SY

4. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	10711-22-08Z	96	360
Durakote plating	ZD	10711-22-08ZD	360	720
Zinc-nickel plating	ZN	10711-22-08ZN	1000	-