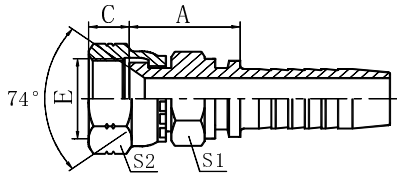
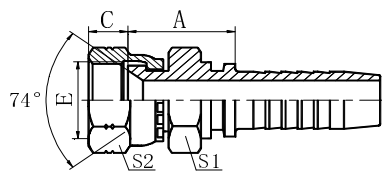


HOSE FITTING**26711D-SM****26712D-SM****26711D****26712D**JIC FEMALE 74° CONE SEAT
DOUBLE HEXAGON

REF. ISO 12151-5 / SAE J516

PART NO.		THREAD E	HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	S1	S2
NIPPLE WITH SMALLER HEX SIZE									
26711D-04-04SMZ	-	7/16"-20	6	-04		20	9	12	14
26711D-06-04SMZ	-	9/16"-18	6	-04		21	10	14	19
26711D-06-06SMZ *	26712D-06-06SMZ	9/16"-18	10	-06		21	10	17	19
26711D-08-06SMZ	26712D-08-06SMZ	3/4"-16	10	-06		24.5	11	19	22
26711D-08-08SMZ *	26712D-08-08SMZ	3/4"-16	12	-08		23.5	11	19	22
26711D-10-08SMZ	26712D-10-08SMZ	7/8"-14	12	-08		26	13	22	27
26711D-10-10SMZ	26712D-10-10SMZ	7/8"-14	16	-10		27	13	22	27
26711D-12-08SMZ *	26712D-12-08SMZ	1.1/16"-12	12	-08		29.5	15	27	32
26711D-12-12SMZ *	26712D-12-12SMZ	1.1/16"-12	20	-12		31.5	15	27	32
26711D-16-16SMWZ	26712D-16-16SMWZ	1.5/16"-12	25	-16		37.5	15.2	32	41
26711D-20-20SMWZ	26712DN-20-20SMWZ	1.5/8"-12	32	-20		41/45	16	41	50
26711D-24-24SMWZ	26712DN-24-24SMWZ	1.7/8"-12	38	-24		42/46	18.6	46	60
26711D-32-32SMWZ	26712DN-32-32SMWZ	2.1/2"-12	50	-32		45/50	23.5	65	75
NIPPLE AND NUT ARE SAME HEX SIZE									
26711D-04-04Z *	-	7/16"X20	6	04		20	9	14	14
26711D-05-05Z *	-	1/2"X20	8	05		22	9.5	17	17
26711D-06-04Z	-	9/16"X18	6	04		21	10	19	19
26711D-06-05Z	-	9/16"X18	8	05		21	10	19	19
26711D-06-06Z *	26712D-06-06Z	9/16"X18	10	06		21	10	19	19
26711D-08-06Z *	26712D-08-06Z	3/4"X16	10	06		25	11	24	24
26711D-08-08Z *	26712D-08-08Z	3/4"X16	12	08		24.5	11	24	24
26711D-10-08Z *	26712D-10-08Z	7/8"X14	12	08		26	13	27	27
26711D-10-10Z *	26712D-10-10Z	7/8"X14	16	10		27	13	27	27
26711D-12-10Z	26712D-12-10Z	1.1/16"X12	16	10		31	15	32	32
26711D-12-12Z *	26712D-12-12Z *	1.1/16"X12	20	12		31.5	15	32	32
26711D-16-12Z	26712D-16-12Z	1.5/16"X12	20	12		33.5	15.2	41	41
26711D-16-16Z *	26712D-16-16Z *	1.5/16"X12	25	16		34.5	15.2	41	41

1. The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.

2. Part no. marked with "*" is recommended.

3. Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z/WZ	26711D-08-08Z
304 stainless steel	SR/SRW	26711D-08-08SR
316L stainless steel	SV/SVW	26711D-08-08SV
316Ti stainless steel	SY/SYW	26711D-08-08SY

4. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	26711D-08-08Z	96	360
Durakote plating	ZD	26711D-08-08ZD	360	720
Zinc-nickel plating	ZN	26711D-08-08ZN	1000	-