


HOSE FITTING

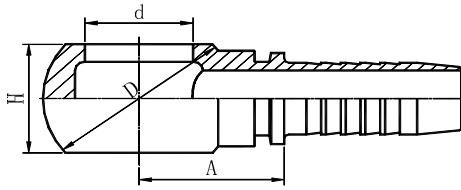

BSP BANJO

72011

72012

PART NO.		BOLT	HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	d	D	H
72011-02-03Z	-	G1/8"X28	5	03		18	9.9	24	16
72011-02-04Z	-	G1/8"X28	6	04		18.5	9.9	24	16
72011-04-03Z	-	G1/4"X19	5	03		19	13.3	24	15
72011-04-04Z *	-	G1/4"X19	6	04		19.5	13.3	24	15
72011-04-05Z	-	G1/4"X19	8	05		19	13.3	24	15
72011-04-06Z	72012-04-06Z	G1/4"X19	10	06		19.5	13.3	24	15
72011-06-04Z	-	G3/8"X19	6	04		22	16.7	29	20
72011-06-05Z	-	G3/8"X19	8	05		22.5	16.7	29	20
72011-06-06Z *	72012-06-06Z	G3/8"X19	10	06		22	16.7	29	20
72011-06-08Z	72012-06-08Z	G3/8"X19	12	08		22.5	16.7	29	20
72011-08-05Z	-	G1/2"X14	8	05		27.5	21	38	25
72011-08-06Z	72012-08-06Z	G1/2"X14	10	06		27.5	21	38	25
72011-08-08Z *	72012-08-08Z	G1/2"X14	12	08		28	21	38	25
72011-08-10Z	72012-08-10Z	G1/2"X14	16	10		28.5	21	38	25
72011-10-10Z	72012-10-10Z	G5/8"X14	16	10		30	23	40	27
72011-12-10Z	72012-12-10Z	G3/4"X14	16	10		31.5	26.5	48	31
72011-12-12Z	72012-12-12Z	G3/4"X14	20	12		32	26.5	48	31
72011-16-08Z	72012-16-08Z	G1"X11	12	08		40	33.3	60	42
72011-16-12Z	72012-16-12Z	G1"X11	20	12		40	33.3	60	42
72011-16-16Z	72012-16-16Z	G1"X11	25	16		41	33.3	60	42

1. Part no. marked with "*" is recommended.
2. It do not include bolt in above part no., bolt need ordered another, and the detail see 720B sheet.
3. Material options for nipple.

Nipple material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z	72011-08-08Z
304 stainless steel	SR	72011-08-08SR
316L stainless steel	SV	72011-08-08SV
316Ti stainless steel	SY	72011-08-08SY

4. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	72011-08-08Z	96	360
Durakote plating	ZD	72011-08-08ZD	360	720
Zinc-nickel plating	ZN	72011-08-08ZN	1000	-