


HOSE FITTING

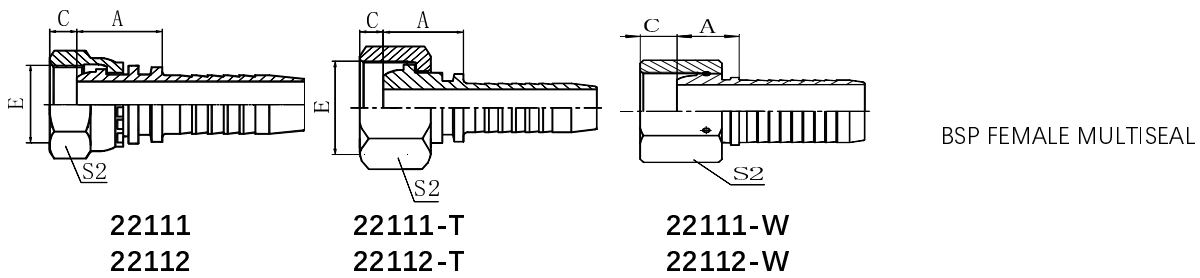

PART NO.		THREAD E	HOSE SIZE			DIMENSIONS			
BRAIDED	SPIRAL		DN	DASH		A	C	S2	
22111-02-04Z	-	G1/8"X28	6	04		19	2	14	
22111-04-03Z	-	G1/4"X19	5	03		19	4	19	
22111-04-04Z *	-	G1/4"X19	6	04		19.5	4	19	
22111-06-05Z	-	G3/8"X19	8	05		20	5	22	
22111-06-06Z *	22112-06-06Z	G3/8"X19	10	06		20.5	5	22	
22111-06-08Z	22112-06-08Z	G3/8"X19	12	08		21	5	22	
22111-08-06TZ	22112-08-06TZ	G1/2"X14	10	06		20	6	27	
22111-08-08Z *	22112-08-08Z	G1/2"X14	12	08		23	6	27	
22111-08-10Z	22112-08-10Z	G1/2"X14	16	10		23.5	6	27	
22111-10-10Z	22112-10-10Z	G5/8"X14	16	10		24	8	30	
22111-10-12Z	22112-10-12Z	G5/8"X14	20	12		25	8	30	
22111-12-08TZ	22112-12-08TZ	G3/4"X14	12	08		23	9	32	
22111-12-10Z	22112-12-10Z	G3/4"X14	16	10		25.5	9	32	
22111-12-12Z	22112-12-12Z	G3/4"X14	20	12		26	9	32	
22111-16-12TZ	22112-16-12TZ	G1"X11	20	12		24.5	11	41	
22111-16-16Z	22112-16-16Z	G1"X11	25	16		28	10.5	41	
22111-20-16TZ	22112-20-16TZ	G1.1/4"X11	25	16		28	9.1	50	
22111-20-20WZ	22112N-20-20WZ	G1.1/4"X11	32	20		29.5/32.1	9.1	50	
22111-24-24WZ	22112N-24-24WZ	G1.1/2"X11	40	24		37/40	11.5	55	
22111-32-32WZ	22112N-32-32WZ	G2"X11	50	32		37/41.4	15.3	70	

1. The dimension A before "/" is for braided hose fitting and after "/" is for spiral hose fitting.
2. Part no. marked with "*" is recommended.
3. Material options for fitting.

Fitting material	Part. No. suffix	Part No. example
Carbon steel (Default)	Z/TZ/WZ	22111-08-08Z
304 stainless steel	SR/SRT/SRW	22111-08-08SR
316L stainless steel	SV/SVT/SVW	22111-08-08SV
316Ti stainless steel	SY/SYT/SYW	22111-08-08SY

4. Plating options and performance for carbon steel fittings.

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust (Hours)
Cr3+ plating (Default)	Z	22111-08-08Z	96	360
Durakote plating	ZD	22111-08-08ZD	360	720
Zinc-nickel plating	ZN	22111-08-08ZN	1000	-